
## **Product Information Sheet**

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Vito						
Supplier's address: -						
Model identifier: 3300180						
Type of light so	urce:					
Lighting techno	logy used:	LED	Non-directional or directional:	DLS		
Light source cap (or other electri		TERMINAL CONNECTOR				
Mains or non-m	nains:	MLS	Connected light source (CLS):	No		
Colour-tuneable light source:		No	Envelope:	-		
High luminance light source:		No				
Anti-glare shield	d:	No	Dimmable:	No		
Product parameters						
Parameter		Value	Parameter	Value		
General product parameters:						
Energy consumption in on- mode (kWh/1000 h), rounded up to the nearest integer		18	Energy efficiency class	D		
Useful luminous flux (φuse), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		2 160 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000		
On-mode power (P <sub>on</sub> ), expressed in W		18,0	Standby power (P <sub>sb</sub> ), expressed in W and rounded to the sec- ond decimal	0,00		
Networked standby power (P <sub>net</sub> ) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	80		
Outer dimen-	Height	590	Spectral power dis-	See image		
sions without separate con- trol gear, light- ing control	Width Depth	60 36	tribution in the range 250 nm to 800 nm, at full-load	in last page		

parts and non-			
lighting con- trol parts, if			
any (millime-			
tre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordi-	0,375
		nates (x and y)	0,377
Parameters for directional light s	ources:		
Peak luminous intensity (cd)	2 160	Beam angle in de-	100
		grees, or the range	
		of beam angles that	
		can be set	
Parameters for LED and OLED lig	ht sources:		
R9 colour rendering index value	10	Survival factor	0,90
the lumen maintenance factor	0,90		
Parameters for LED and OLED ma	ains light sources	<b>:</b>	
displacement factor (cos φ1)	0,50	Colour consistency	6
		in McAdam ellipses	
Claims that an LED light source	_(b)	If yes then replace-	-
replaces a fluorescent light		ment claim (W)	
source without integrated bal-			
last of a particular wattage.			
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,4

(a)<sub>'-'</sub>: not applicable;

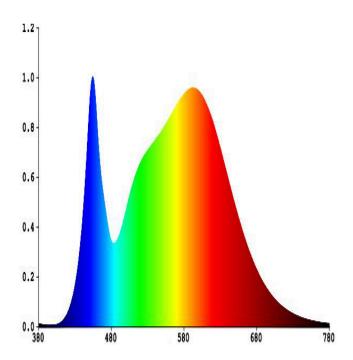

Model placed on the Union market from 18/07/2024.



**EPREL registration number:** 2083933 https://eprel.ec.europa.eu/qr/20

83933

Supplier: VITO EUROPE Ltd. (Importer) Website: www.vitolighting.com

**Customer care service:** 

Name: Website:

Email: Phone:

Address: